




**Инструкция по настройке
и подключению ADSL-модема
D-Link DSL-500T**

Откройте Internet Explorer, в адресной строке наберите `http://192.168.1.1` и нажмите кнопку Переход. В появившемся окне введите Имя пользователя `admin` и пароль `admin`, поставьте галочку “Сохранить пароль в списке паролей” и нажмите кнопку “ОК”

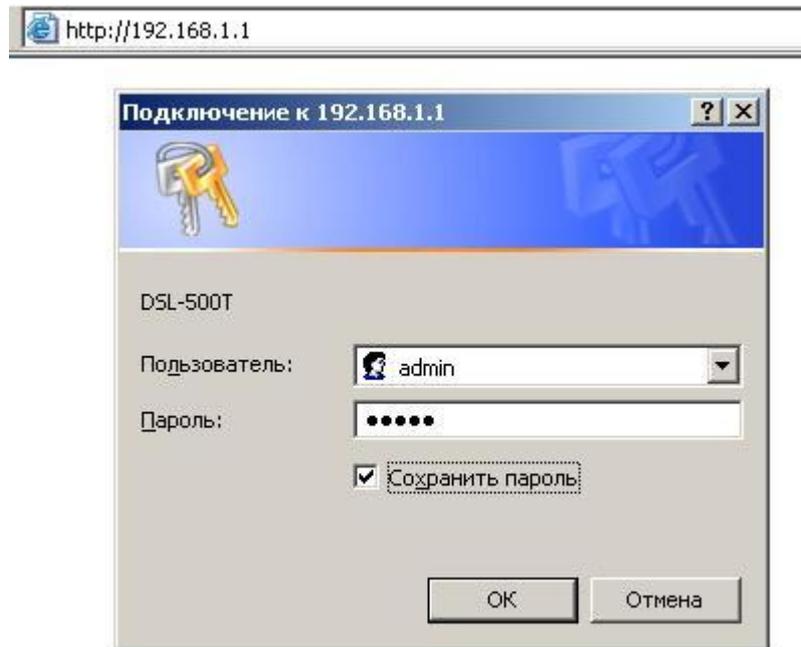

В открывшемся окне нажмите вкладку WAN, перед Вами появится следующее окно. В этом окне в выпадающем меню PVC выберите PVC1.

Далее нужно исправить Virtual Circuit на Enabled, т.к. по умолчанию он находится в режиме Disabled а также поменять существующие VPI/VCI значения на 0/41 и нажать кнопку Apply.



D-Link
Building Networks for People

DSL-500T
ADSL Router

Home **Advanced** Tools Status Help

Wizard
WAN
LAN
DHCP
DNS
Dynamic DNS
Logout

ATM VC Setting

PVC

VPI

VCI

Virtual Circuit

WAN Setting

Bridge Mode

Connection Type

ATM

Service Category

PCR kbps

SCR kbps

CDVT uSeconds

MBS Cells

Please save and reboot the device to take effect !

Apply Cancel Help

Теперь нужно сохранить все выбранные вами настройки , нажмите вкладку Tools

D-Link
Building Networks for People

DSL-500T
ADSL Router

Home Advanced **Tools** Status Help

Admin
Time
Remote Log
System
Firmware
Miscellaneous
Test

Administrator Settings

There are two accounts that can access the DSL-500T's Web-Management interface.

Administrator (The Login Name is "admin")

Select Modify admin password Modify user password

Modify admin password

New Password

Confirm Password

WebPort (Change the port number of login web)

Modify user password

New Password

Confirm Password

Remote Web Management

Далее System , Save and Reboot

Home Advanced **Tools** Status Help

System Settings

The current system settings can be saved as a file onto the local hard drive.

Save Settings To Local Hard Drive

Save

Load Settings From Local Hard Drive

Обзор...

Load

Note: The system has to be restarted after the configuration is restored.

Save Settings and Reboot the System.

Save and Reboot

Restore To Factory Default Settings

Restore

+

Всё, Ваш модем готов для просмотра IPTV.